


# ↑ STEEL LANYARD "I"

Steel anchoring lanyard. Useful for tree care or welding at height.

## DESCRIPTION

Steel wire cable with the diameter 6 mm is protected by thick PVC tube. Outer diameter of the tube is 13 mm.

Available in three lengths as an anchor point and lanyard:  
 STEEL LANYARD 100 cm  
 STEEL LANYARD 130 cm  
 STEEL LANYARD 180 cm  
 and in two lengths as an anchor point:  
 STEEL ANCHOR 300 cm  
 STEEL ANCHOR 500 cm

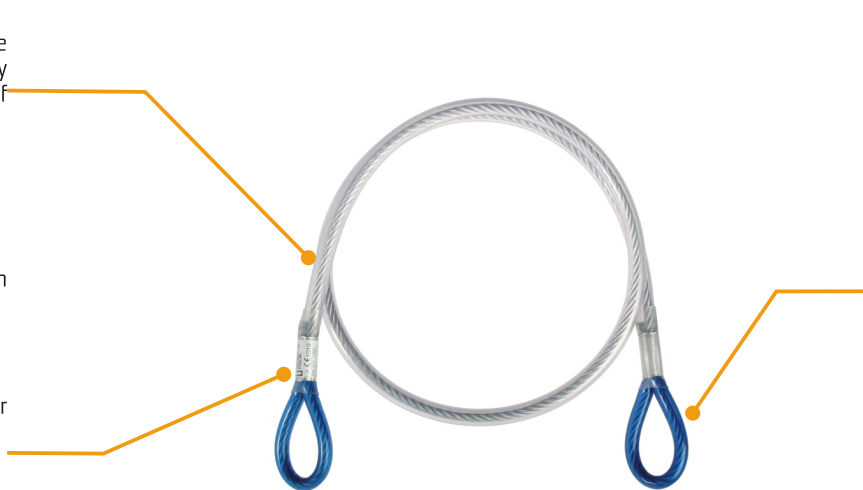

Attachment loops have different colors:  
 length 100 cm - yellow  
 length 130 cm - blue  
 length 180 cm - red

## KEY FEATURES

- resistant against cut
- resistant against burning

## STANDARDS

CE 1019  
 EN 795/B  
 EN 354


## FEATURES

					
15 kN	100 cm 130 cm 180 cm	one person only	295 g / 10,4 oz 350 g / 12,3 oz 460 g / 16,2 oz	unique number	warranty

## MATERIAL

- 55% zinc plated steel
- 5% aluminum alloy
- 40% PVC

## TECHNICAL DATA

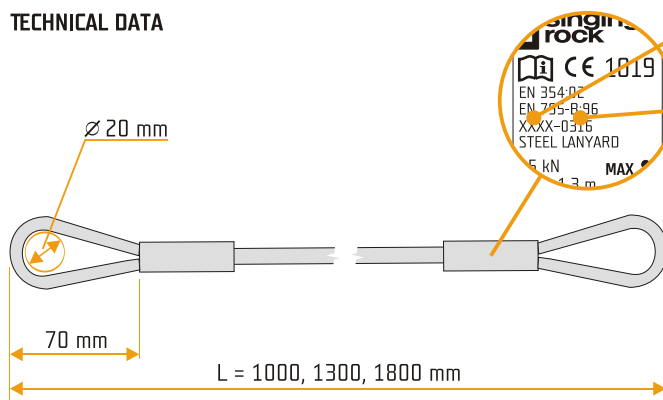

unique number XXXX  
 batch number MMY (month, year of production)

## COMPARISON

### STEEL LANYARD RK850 - STEEL LANYARD W2283

- thicker PVC tube for better durability
- different colors of attachment loops for better length recognition

## MAINTENANCE

Without taking wear or mechanical damage into account and on conditions specified in general and specific instructions for use this product may be used 15 years since the date of production and 10 years from the date of first use, whichever is the sooner.

		
beware of salt	-20 - 40°C	read instruction